

Memory Product Specification

A4S16G32CLYBDAA-1

16GB 2G x 64

DDR4-3200MHz CL20 Overclocking SO-DIMM

Description:

The overclocking SO-DIMM for 2G x 64 of 16GB DDR4-3200MHz

CL20-22-22-38 at 1.35V Memory Module.

The Module base on sixteen 1024M x 8 DDR4 FBGA SDRAM components.

The SPDs are programmed to JEDEC standard latency DDR4-2133MHz of CL15-15-15 at 1.2V.

Memory Module intended for mounting into 260-pin edge connector sockets.

The electrical and mechanical specifications are as follows:

Features:

- DDR4 Speed Grade : 2133Mbps
- Organization
 - 2G x 64, 2 ranks
- Mounting 16 pieces of 8G bits DDR4 SDRAM sealed in FBGA
- Package: 260-pin socket type small outline dual in-line memory module (SO-DIMM)
 - PCB height: 1.181 inch (30.00 mm)
 - Lead-free (RoHS compliant)
 - Halogen free
- Power supply: VDD = 1.2V (1.14V to 1.26V)
- 16 internal banks (4 Bank Groups)
- Burst lengths (BL): 8 and 4 with Burst Chop (BC)
- Precharge: auto precharge option for each burst access


- Refresh: auto-refresh, self-refresh
- Refresh cycles
 - Average refresh period
 - 7.8 μ s at 0°C $\leq$ TC $\leq$ +85°C
 - 3.9 μ s at +85°C < TC $\leq$ +95°C
- Operating case temperature range
 - TC = 0°C to +95°C

Overclocking Datasheet w/ Intel XMP:

- DDR4 Speed Grade : 3200Mbps
- Power supply: VDD Voltage : 1.35V
VDDQ Voltage: 1.35V
- CAS latency : CL20-22-22-38
- Bandwidth : 25600MB/s
- Serial presence detect with EEPROM.
- PCB height : 1.181 inch (30.00 mm)
- RoHS Compliant
- Halogen free
- Application : Gaming player

Dimensions

Unit: mm

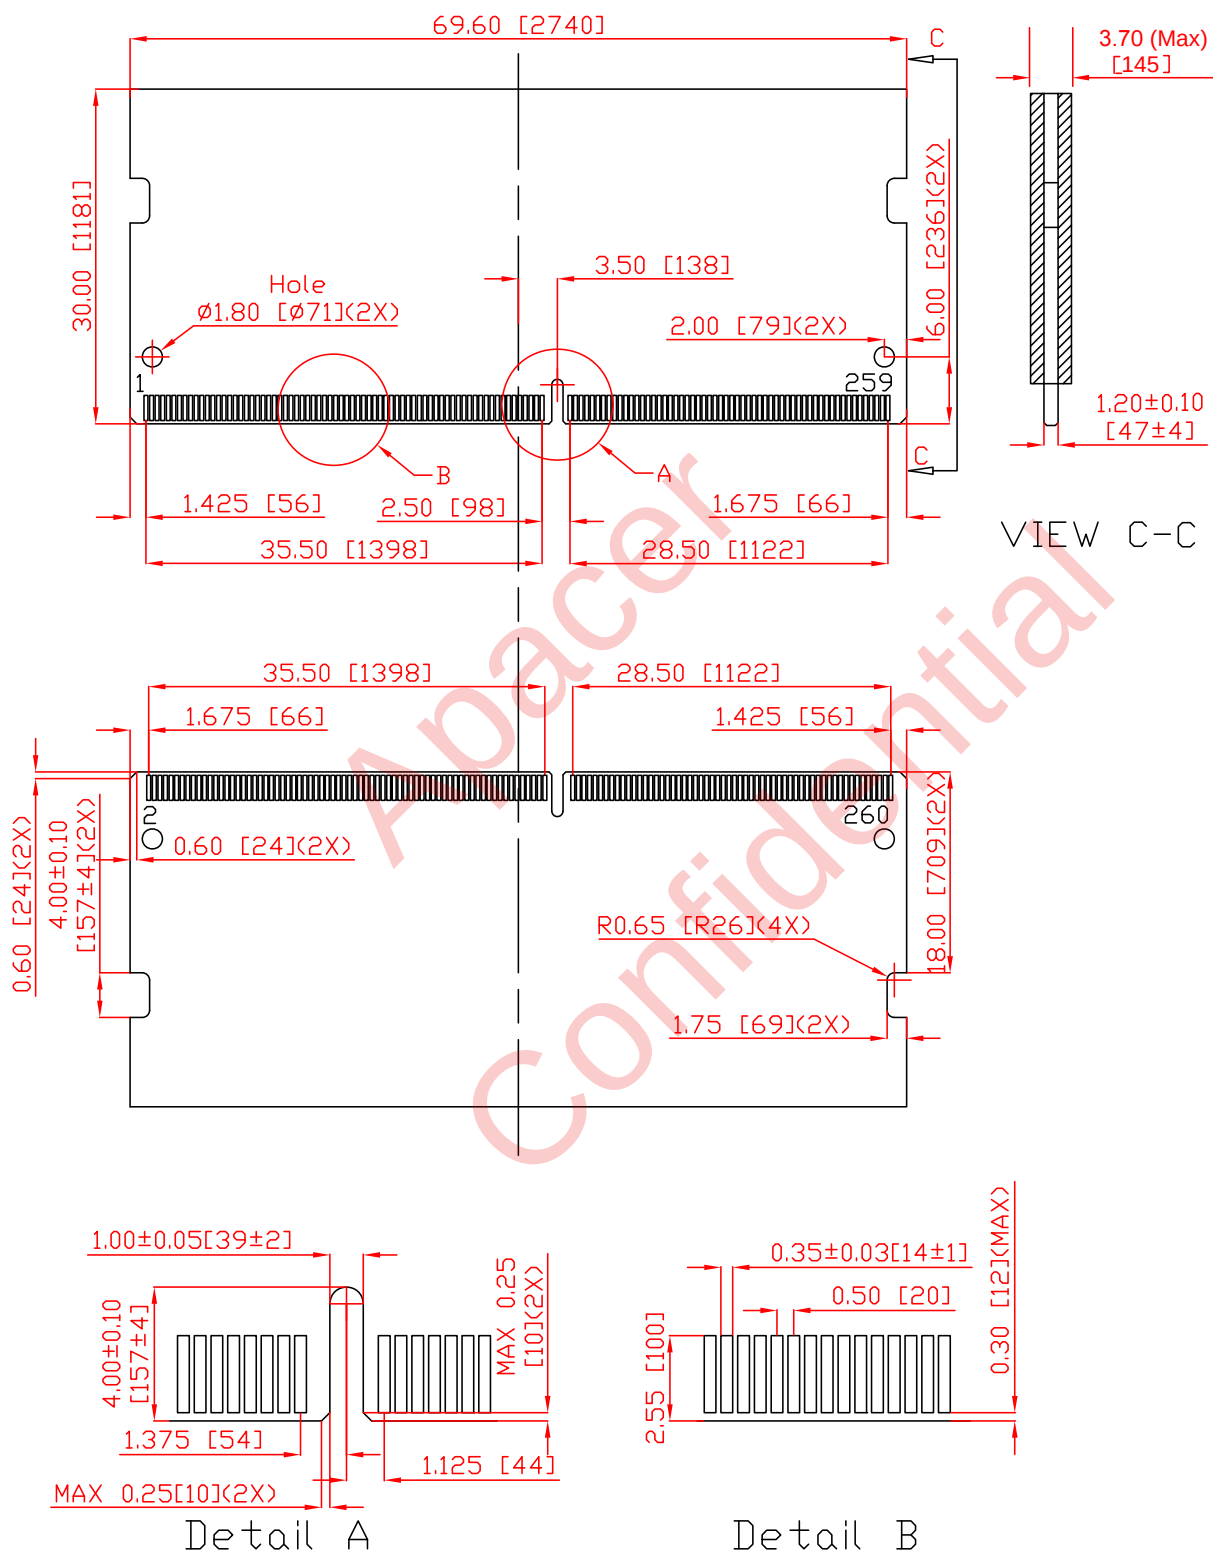

(All dimensions are in millimeters with ± 0.15 mm tolerance unless specified otherwise.)