

RoHS Compliant

PCI Express Disk Module

M.2 PDM PT60 Product Specifications

July 17, 2015

Version 1.0



Apacer Technology Inc.

1F, No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City, Taiwan, R.O.C

Tel: +886-2-2267-8000 Fax: +886-2-2267-2261

www.apacer.com

Features:

- **Standard PCI Express bus interface**
 - PCI Express Specification Rev.2.0*
 - PCI Express Card Electromechanical Rev. 2.0
 - PCI Express Gen2 x 2
 - Supports Separate Reference Clock Independent SSC
- **Capacity**
 - 16, 32, 64, 128 GB
- **Performance****
 - Sequential Read Speed up to 740 MB/s
 - Sequential Write Speed up to 345 MB/s
- **Flash Management**
 - ECC
 - Wear leveling
 - Flash bad-block management
 - Power Failure Management
- **NAND Flash: MLC**
- **Temperature ranges**
 - Operating: 0°C to 70°C
 - Storage: -40°C to 100°C
- **Supply voltage**
 - 3.3 V $\pm 5\%$
- **Power consumption****
 - Active mode: 1,380 mA
 - Idle mode: 540 mA
- **Form factor**
 - M.2 2260-D2-B-M
 - Dimensions: 60.00x22.00x3.70, unit: mm
- **RoHS compliant**
- **Supports NCQ (Native Command Queue) commands**
- **Supports AHCI programming interface**

*Not backward compatible. Operational instability or inefficiency will occur if this device is applied on a PCIe 1.0 socket.

**The performance and power consumption values addressed here are typical and may vary from platforms.

Table of Contents

1. General Description	3
1.1 Error Correction/Detection	3
1.2 Flash Block Management	3
1.3 Wear Leveling	3
1.4 Power Failure Management	3
2. Pin Assignments	4
3. Product Specification	7
3.1 Capacity	7
3.2 Performance	7
3.3 Environmental Specification	7
4. Electrical Specification	8
5. Mechanical specifications	9
6. Product Ordering Information	10
6.1 Product Code Designations	10
6.2 Valid Combinations	11

1. General Description

Apacer's M.2 PT60 module-type SSD offers a breakthrough in non-volatile memory storage. Formed as a compact M.2 2242 form factor, PT60 can fit in various types of embedded platforms, such as workstation, thin computing devices and high-end heavy duty servers where spaces are concerned. Regarding data transfer rate, PT60 delivers ideal data read/write performance.

Apacer M.2 PT60 is designed in PCI-Express 2.0 pinout, and is compatible with 5.0 Gbps maximum transfer rate. Compatibility wise, this M.2 SSD is not only fully compliant with PCI Express Specification Rev.2.0 and Electromechanical Rev.2.0, but also supports NCQ commands and AHCI operational modes.

1.1 Error Correction/Detection

The ECC engine in this device can detect and correct up to 72 bits error in 1K bytes.

1.2 Flash Block Management

Bad blocks are blocks that include one or more invalid bits, and their reliability is not guaranteed. Blocks that are identified and marked as bad by the manufacturer are referred to as "Initial Bad Blocks". Bad blocks that are developed during the lifespan of the flash are named "Later Bad Blocks". Thus, this device implements an efficient bad block management algorithm to detect the factory-produced bad blocks and manages any bad blocks that appear with use. This practice further prevents data being stored into bad blocks and improves the data reliability.

1.3 Wear Leveling


NAND Flash devices can only undergo a limited number of program/erase cycles, and in most cases, the flash media are not used evenly. If some area get updated more frequently than others, the lifetime of the device would be reduced significantly. Thus, Wear Leveling technique is applied to extend the lifespan of NAND Flash by evenly distributing write and erase cycles across the media. Apacer provides advanced Wear Leveling algorithm, which can efficiently spread out the flash usage through the whole flash media area. Moreover, by implementing both dynamic and static Wear Leveling algorithms, the life expectancy of the NAND Flash is greatly improved.

1.4 Power Failure Management

Power Failure Management plays a crucial role when experiencing unstable power supply. Power disruption may occur when users are storing data into the SSD. In this urgent situation, the controller would run multiple write-to-flash cycles to store the metadata for later block rebuilding. This urgent operation requires about several milliseconds to get it done. At the next power up, the firmware will perform a status tracking to retrieve the mapping table and resume previously programmed NAND blocks to check if there is any incompleteness of transmission.

2. Pin Assignments

This connector does not support hot plug capability. There are a total of 75 pins. 12 pin locations are used for mechanical key locations; this allows such a module to plug into both Key B and Key M connectors.

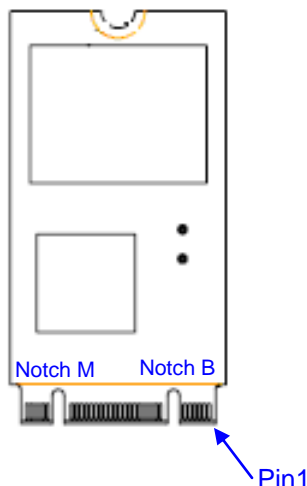

Pin	Type	Description
1	CONFIG_3	Ground (according to M.2 configurations for PCIe SSD definition)
2	3.3V	Supply Pin, 3.3V
3	GND	Ground
4	3.3V	Supply pin, 3.3V
5	No connect	No connect
6	Not available	No connect (used for other purposes)
7	Not available	No connect (used for other purposes)
8	Not available	No connect (used for other purposes)
9	No connect	No connect
10	DAS/DSS	Device Activity Signal/Disable Staggered Spin-up
11	No connect	No connect (used for other purposes)
12	(removed for key)	Mechanical notch B
13	(removed for key)	Mechanical notch B
14	(removed for key)	Mechanical notch B
15	(removed for key)	Mechanical notch B
16	(removed for key)	Mechanical notch B
17	(removed for key)	Mechanical notch B
18	(removed for key)	Mechanical notch B
19	(removed for key)	Mechanical notch B
20	Not available	No connect (used for other purposes)
21	CONFIG_0	Ground (according to M.2 configurations for PCIe SSD definition)

PCI-Express Disk Module

APPxxxx5GA-AXX

22	Not available	No connect (used for other purposes)
23	Not available	No connect (used for other purposes)
24	Not available	No connect (used for other purposes)
25	Not available	No connect (used for other purposes)
26	Not available	No connect (used for other purposes)
27	GND	Ground
28	Not available	No connect (used for other purposes)
29	PETn1	
30	Not available	No connect (used for other purposes)
31	PETp1	
32	Not available	No connect (used for other purposes)
33	GND	Ground
34	Not available	No connect (used for other purposes)
35	PERn1	
36	Not available	No connect (used for other purposes)
37	PERp1	
38	Not available	No connect (used for other purpose)
39	GND	Ground
40	Not available	No connect (used for other purposes)
41	PETn0	
42	Not available	No connect (used for other purposes)
43	PETp0	
44	Not available	No connect (used for other purposes)
45	GND	Ground
46	Not available	No connect (used for other purposes)
47	PERn0	
48	Not available	No connect (used for other purposes)
49	PERp0	
50	PERST#	
51	GND	Ground
52	Not Available	No connect (used for other purposes)
53	REFCLKN	
54	Not Available	No connect (used for other purposes)
55	REFCLKP	
56	Not Available	No connect (used for other purposes)
57	GND	Ground
58	Not Available	No connect (used for other purposes)
59	(removed for key)	Mechanical notch M

PCI-Express Disk Module
APPxxxx5GA-AXX

60	(removed for key)	Mechanical notch M
61	(removed for key)	Mechanical notch M
62	(removed for key)	Mechanical notch M
63	(removed for key)	Mechanical notch M
64	(removed for key)	Mechanical notch M
65	(removed for key)	Mechanical notch M
66	(removed for key)	Mechanical notch M
67	Not available	No connect (used for other purposes)
68	Not available	No connect (used for other purposes)
69	CONFIG_1	No connect (according to M.2 configurations for PCIe SSD definition)
70	3.3V	Supply pin, 3.3V
71	GND	Ground
72	3.3V	Supply pin, 3.3V
73	GND	Ground
74	3.3V	Supply pin, 3.3V
75	CONFIG_2	Ground

3. Product Specification

3.1 Capacity

Table 3-1: Capacity specifications

Capacity	Total bytes*	Cylinders	Heads	Sectors	Max LBA
16 GB	16,013,942,784	16,383	16	63	31,277,232
32 GB	32,017,047,552	16,383	16	63	62,533,296
64 GB	64,023,257,088	16,383	16	63	125,045,424
128 GB	128,035,676,160	16,383	16	63	250,069,680

*Display of total bytes varies from file systems.

**Cylinders, heads or sectors are not applicable for these capacities. Only LBA addressing applies.

LBA count addressed in the table above indicates total user storage capacity and will remain the same throughout the lifespan of the device. However, the total usable capacity of M.2 PT60 is most likely to be less than the total physical capacity because a small portion of the capacity is reserved for device maintenance usages.

3.2 Performance

Performances specifications of the M.2 PT60 are listed in following tables.

Table 3-2: Performance

Capacity \ Performance	16 GB	32 GB	64 GB	128 GB
Sustained read (MB/s)	315	630	740	740
Sustained write (MB/s)	145	275	290	345

Note: Results may differ from various flash configurations or host system settings.

3.3 Environmental Specification

Environmental specification of M.2 PT60 product family follows the MIL-STD-810F standard.

Table 3-3: Environmental specifications

Environment		Specification
Temperature	Operation (case)	0°C to 70°C
	Storage	-40°C to 100°C
Humidity		5% to 95% RH (Non-condensing)
Vibration (Non-Operating)		Sine wave : 10~2000Hz, 15G (X, Y, Z axes)
Shock (Non-Operating)		Half sine wave, 1500 G (X, Y, Z ; All 6 axes)

4. Electrical Specification

Caution: Absolute Maximum Stress Ratings – Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.

Table 4-1: Absolute maximum stress ratings


Parameter	Min.	Typical	Max.	Units
Power supply	3.13	3.3	3.46	V
Operating case temperature	0		70	°C
Storage temperature	-40		100	°C

Table 4-2: Power consumption (typical)

Capacity	16 GB	32 GB	64 GB	128 GB
State				
Active (mA)	1,000	1,170	1,245	1,380
Idle (mA)	535	535	535	540


*Results may differ from various flash configurations and platforms.

5. Mechanical specifications

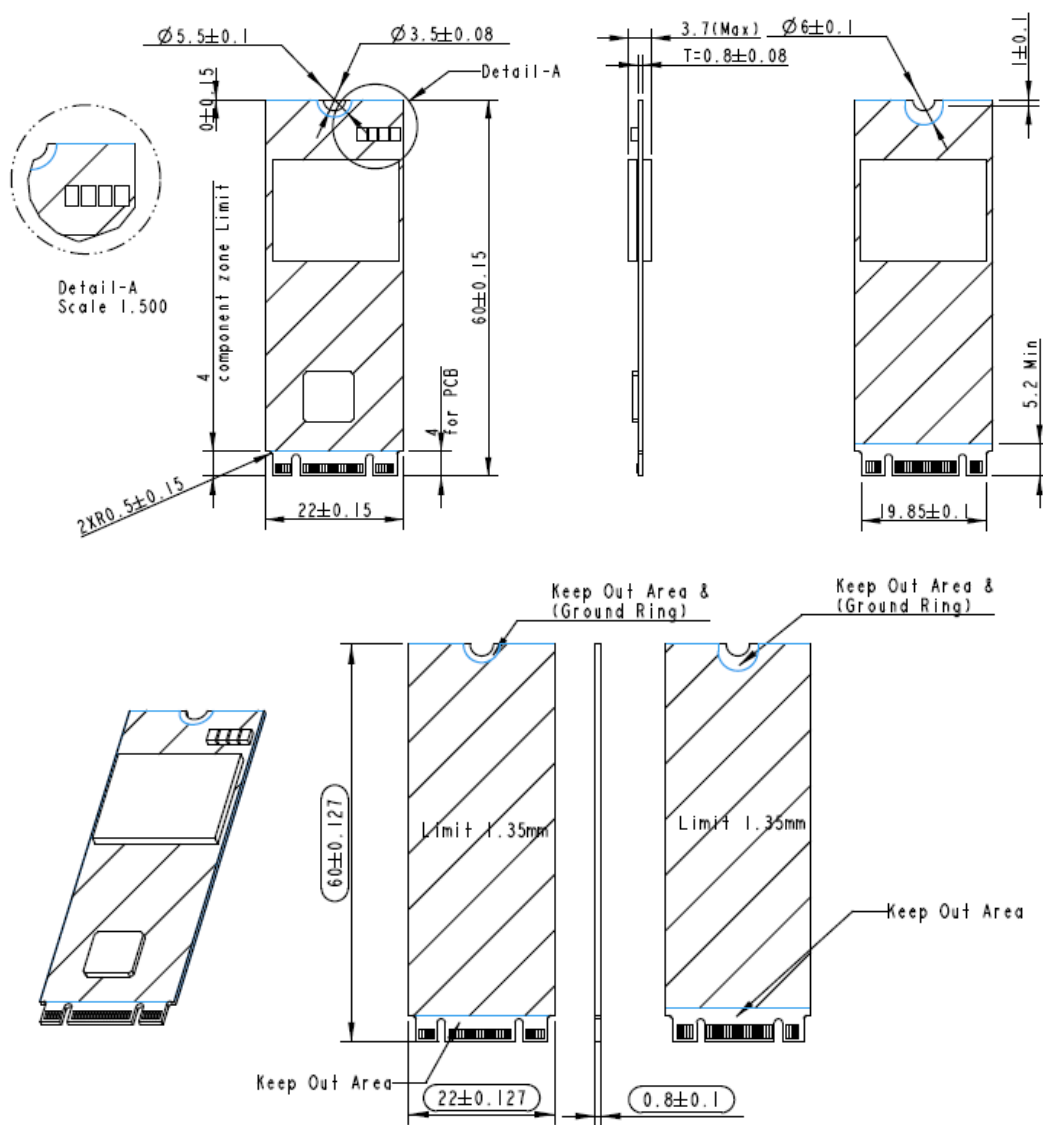

6. Product Ordering Information

6.1 Product Code Designations

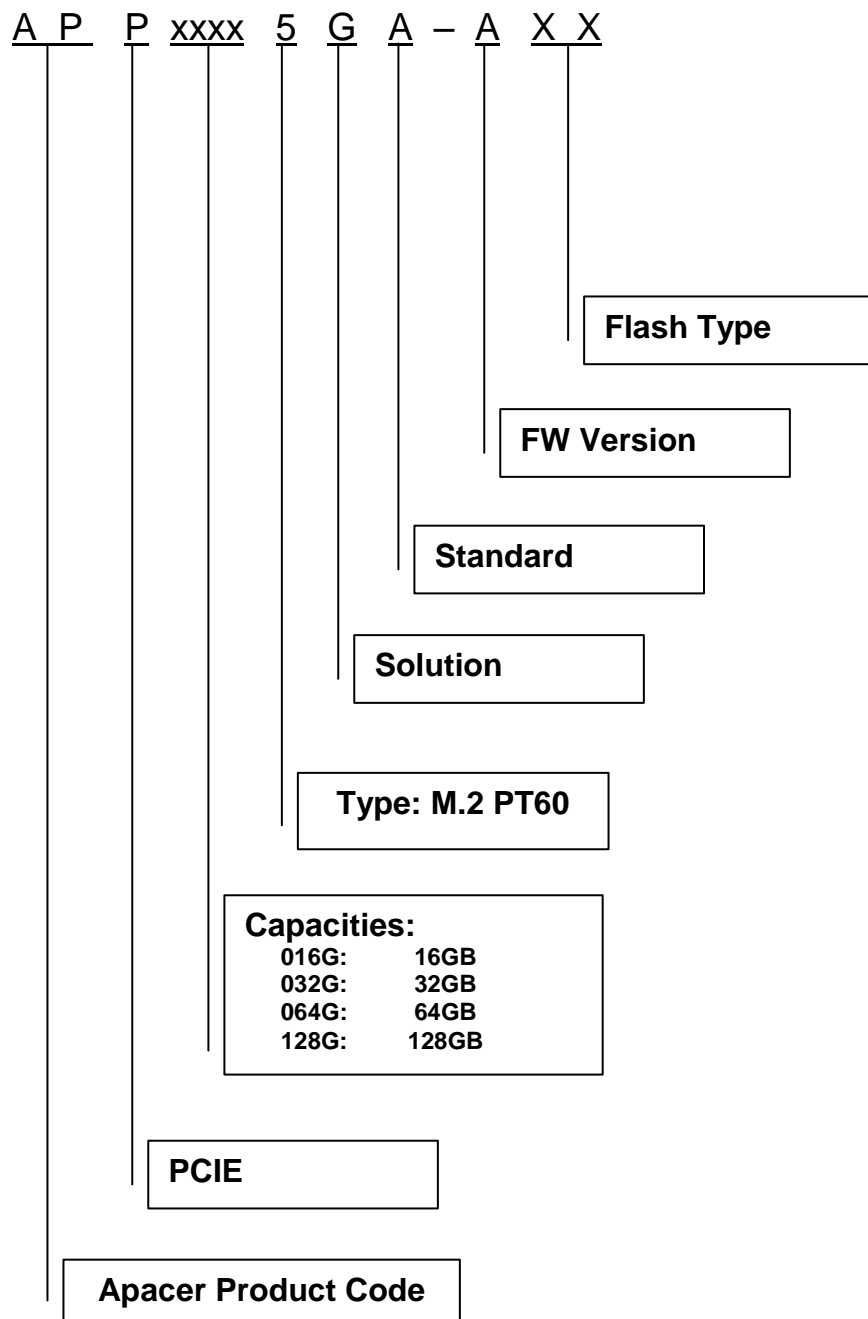

6.2 Valid Combinations

M.2 PT60 Standard

Capacity	Standard
16GB	APP016G5GA-ATM
32GB	APP032G5GA-ATM
64GB	APP064G5GA-ATM
128GB	APP128G5GA-ATM

Note: Valid combinations are those products in mass production or will be in mass production. Consult your Apacer sales representative to confirm availability of valid combinations and to determine availability of new combinations.

Revision History

Revision	Date	Description	Remark
1.0	07/17/2015	Official release	

Global Presence

Taiwan (Headquarters)	Apacer Technology Inc. 1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan R.O.C. Tel: 886-2-2267-8000 Fax: 886-2-2267-2261 amtsales@apacer.com
U.S.A.	Apacer Memory America, Inc. 386 Fairview Way, Suite102, Milpitas, CA 95035 Tel: 1-408-586-1291 Fax: 1-408-935-9611 sa@apacerus.com
Japan	Apacer Technology Corp. 5F, Matsura Bldg., Shiba, Minato-Ku Tokyo, 105-0014, Japan Tel: 81-3-5419-2668 Fax: 81-3-5419-0018 jpservices@apacer.com
Europe	Apacer Technology B.V. Science Park Eindhoven 5051 5692 EB Son, The Netherlands Tel: 31-40-267-0000 Fax: 31-40-267-0000#6199 sales@apacer.nl
China	Apacer Electronic (Shanghai) Co., Ltd Room D,22/FL,No2,Lane600,JieyunPlaza, Tianshan RD,Shanghai,200051,China Tel: 86-21-6228-9939 Fax: 86-21-6228-9936 sales@apacer.com.cn
India	Apacer Technologies Pvt. Ltd. # 535, 1st Floor, 8th cross, JP Nagar 3rd Phase, Bangalore – 560078, India Tel: 91-80-4152-9061 sales_india@apacer.com