

# Specification Sheet

## USB2.0 Flash Drive Handy Steno AH324



### ***Apacer Technology Inc.***

4<sup>th</sup> Fl., 75 Xintai 5<sup>th</sup> Rd., Sec.1, Hsichih, Taipei Hsien 221, Taiwan

Tel: +886-2-2698-2888 Fax: +886-2-2698-2889

[www.apacer.com](http://www.apacer.com)

## Table of Contents

<u>1. Product Introduction</u> .....	3
<u>2. Product Features</u> .....	3
<u>3. Specification</u> .....	4
<u>4. Physical Dimension</u> .....	4

## **1. Product Introduction**

The refined style of AH324, enriched by the glisten, remains the ease-of-use feature of Apacer storage products. Under its semitransparent case, the diamond pattern glitters, giving a marvelous luster and an unusual sight of the components inside. The cap of AH324 can be put at the end of the flash drive, which prevents the common problem of losing USB cap. With the strap hole at the end of the flash drive, users can hang their favorite ornaments, making the USB flash drive easier to carry. The capacity of AH324 ranges from 2GB to 32 GB to satisfy different user needs. The high volume also meets the current user demand for storing massive audio and video files.

## **2. Features**

### **1. Slim and compact**

- Small & slim
- Portability- strap hole makes it easy to carry

### **2. Stylish Mosaic Presentation**

- Pen cap design
- Available colors: red/blue

### **3. Plug & Play Ease of Use**

- Use on any computer with a USB port


### **4. RoHS Compliant**

- USB 2.0 Hi-Speed interface & backward compatible with USB 1.1
- 2GB up to 32GB
- RoHS compliant

### 3. Specifications

Specifications	
Interface	High-speed USB 2.0 certified, backwards compatible with USB 1.1
Power supply	USB bus powered No external power required
Operating Systems Supported	Windows XP/2000/Vista/7, Mac OS 8.6 and Linux 2.6.4 or above
Capacity	2GB~ 32GB
Operating Temperature	0° C to +60° C (32° F to 140° F)
Storage Temperature	-20° C to +60° C (-4° F to +140° F)
Dimensions	(L) 59.8 x (W) 18 x (H) 8.4 mm
Weight	8g approx.

### 4. Physical Dimension

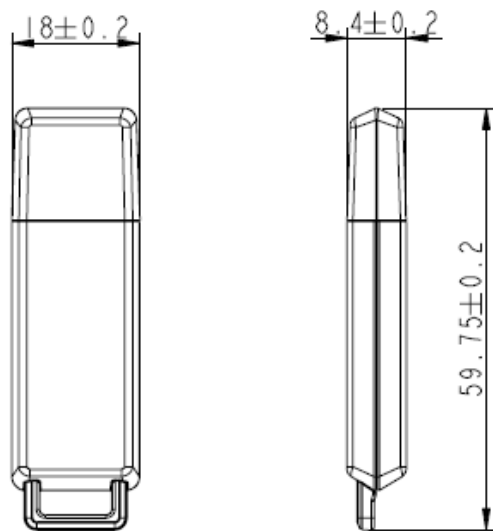

Unit: mm